


**Package Type: IP-2
Package Reference: TC07**



Package Colloquial Name	2947B Half Height LLW ISO Container		
Operating Instruction	OM_0102940_MECH_00002_D		
Dimensions	Length	Width	Height
Usable Internal Dimensions (Excluding under lattice grid base) See figure for details	5983mm 5953mm to vent port shield	2425mm	1106mm
Lid Opening Dimensions	5450 mm	1970 mm	
Dimensions (external)	6058mm	2500mm	1345mm
Vent Port Height	1053mm (from base) 901mm (from grid lattice)		
Payload Capacity	32,340 kg		
Tie down capability to the base	N/A – For compacted pucks and boxes only		
Lid Bolts Torque	170Nm ± 10Nm		
Grout and Vent Port Bolts Torque	38Nm ± 2Nm		
Tare Weight	2,760 kg		
Maximum Gross Weight	35,000 kg		
Max Internal Volume in m³ for Grout/Direct Pour Encapsulation (up to vent port)	15.12 m ³		

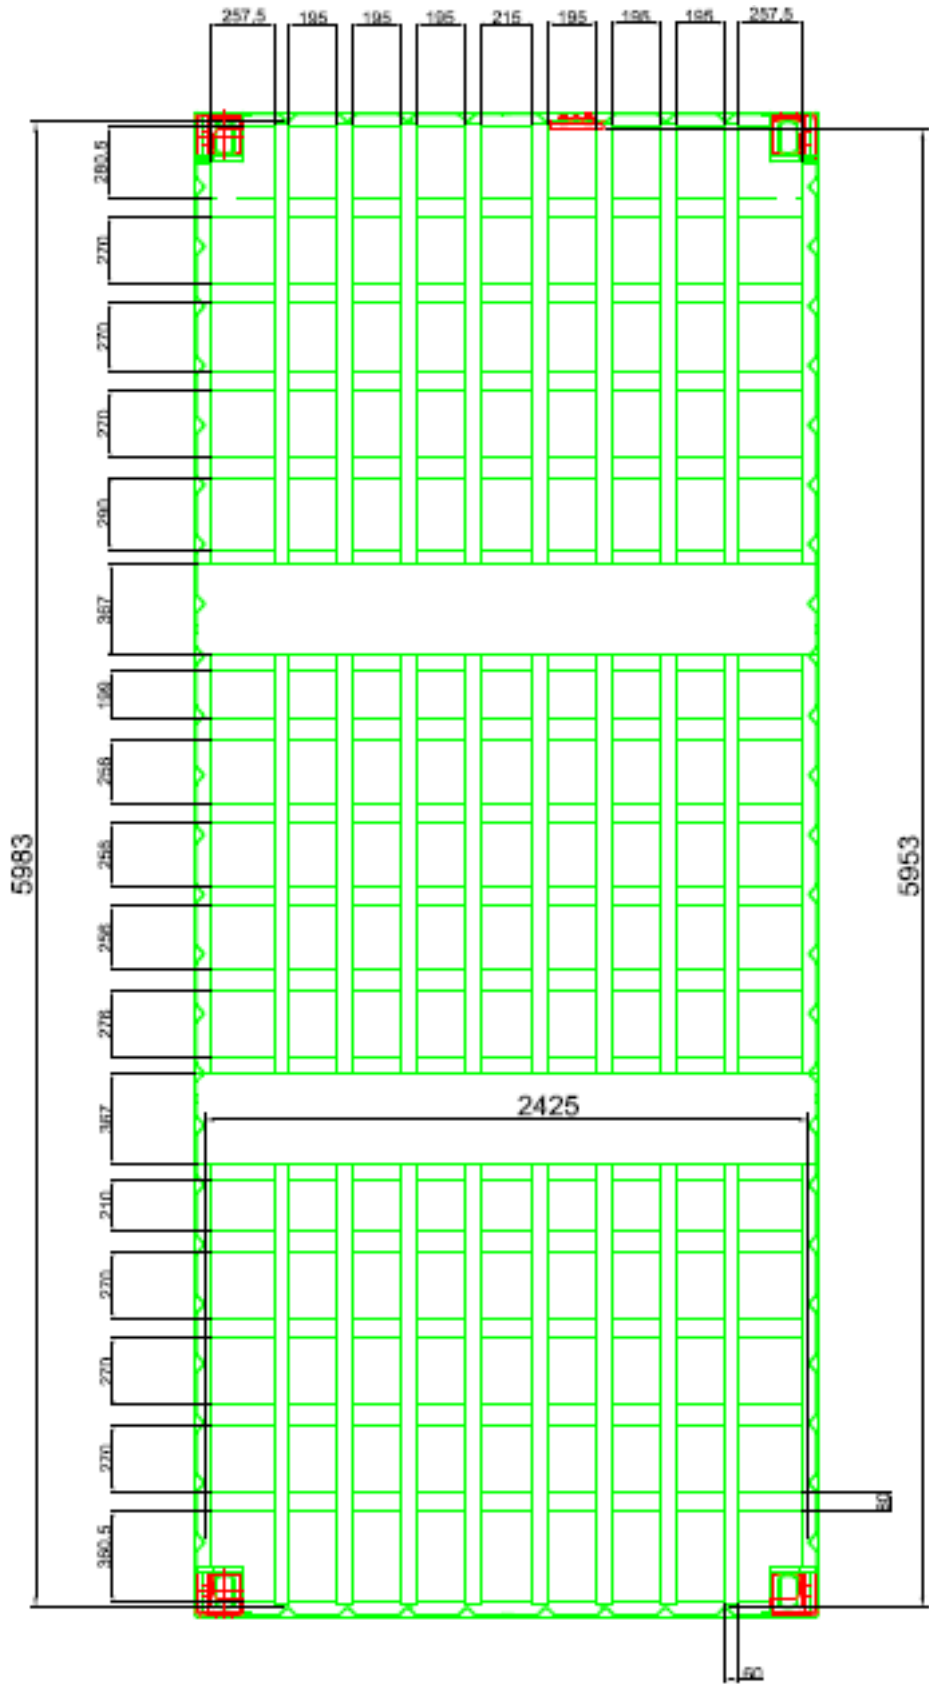

Usable Internal Dimensions