


## Package Type: IP-2 Package Reference: TC08



<b>Package Colloquial Name</b>	2947C Half Height LLW ISO Container		
<b>Operating Instruction</b>	OM_0102940_MECH_00002_D		
<b>Dimensions</b>	Length	Width	Height
<b>Usable Internal Dimensions (Excluding under lattice grid base) See figure for details</b>	5983mm 5953mm to vent port shield	2425mm	1106mm
<b>Lid Opening Dimensions</b>	5554 mm	2080 mm	
<b>Dimensions (external)</b>	6058mm	2500mm	1345mm
<b>Vent Port Height</b>	1053mm (from base) 901mm (from grid lattice)		
<b>Payload Capacity</b>	32,340 kg		
<b>Tie down capability to the base</b>	N/A – For compacted pucks and boxes only		
<b>Lid Bolts Torque</b>	170Nm ± 10Nm		
<b>Grout and Vent Port Bolts Torque</b>	38Nm ± 2Nm		
<b>Tare Weight</b>	Without Rails 2,660 kg With Rails 2,793 kg		
<b>Maximum Gross Weight</b>	35,000 kg		
<b>Max Internal Volume in m<sup>3</sup> for Grout/Direct Pour Encapsulation (up to vent port)</b>	15.12 m <sup>3</sup>		

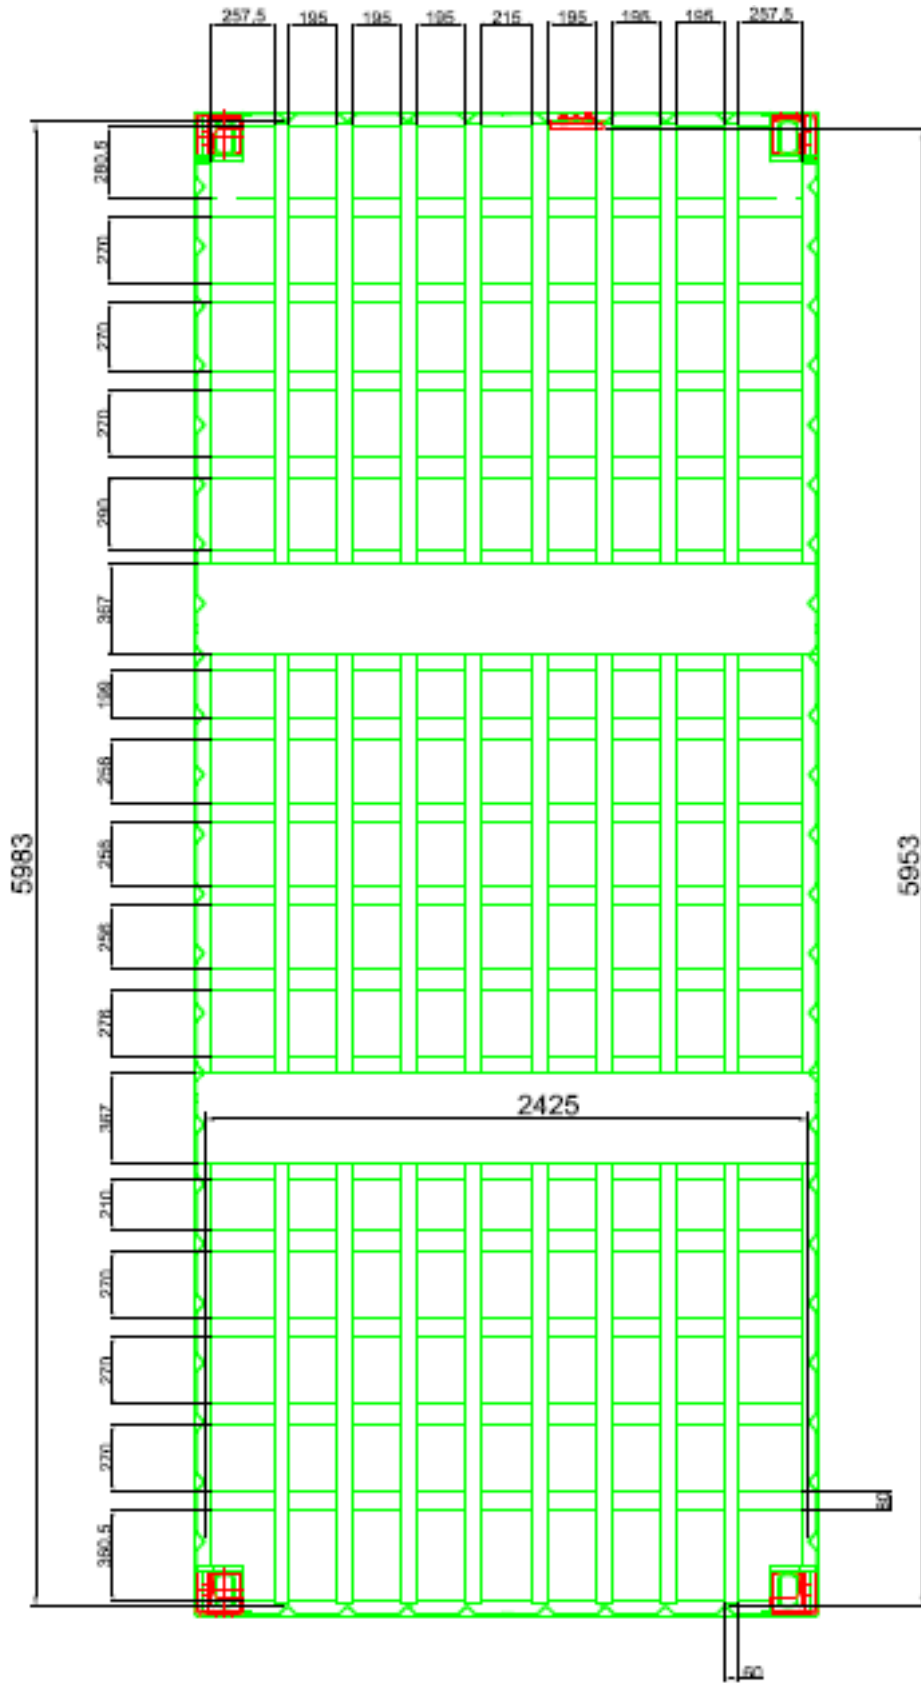

**Usable Internal Dimensions**